

COI/T.20/Doc. no. 25 2006

ENGLISH

Original: ENGLISH

Principe de Vergara, 154 – 28002 Madrid – España Telef.: +34 915 903 638 Fax: +34 915 631 263 - e-mail: iooc@internationaloliveoil.org - http://www.internationaloliveoil.org/

GLOBAL METHOD FOR THE DETECTION OF EXTRANEOUS OILS IN OLIVE OILS

1. SCOPE

The method is used to detect the presence of extraneous vegetable oils in olive oils. High linoleic vegetable oils (soybean, rapeseed, sunflower, etc), and some high oleic vegetable oils - such as hazelnut, high oleic sunflower and olive-pomace oils - are detected. The detection level depends on the type of extraneous oil and the variety of olive. For hazelnut oil, a detection level between 5 and 15% is usually achieved. The method is unable to identify the type of extraneous oil, and only indicates if the olive oil is genuine or nongenuine.

2. PRINCIPLE

The oil is purified by solid phase extraction (SPE) on silica gel cartridges. The triacylglycerol (TAG) composition is determined by reverse phase high resolution liquid chromatography using a refractive index detector and propionitrile as the mobile phase. Fatty acid methyl esters (FAMEs) are prepared from purified oil by methylation with a cold solution of KOH in methanol (Method A in COI/T.20/Doc. no. 24) and then the esters are analysed by capillary gas chromatography using high polar columns (COI/T.20/Doc.no 17). The theoretical triacylglycerol composition is calculated from the fatty acid composition by a computer program assuming a 1,3-random, 2-random distribution of fatty acids in the triacylglycerol, with restrictions for saturated fatty acids in the 2-position. The calculation method is a modification of the procedure described in COI/T.20/Doc. no. 20. Several mathematical algorithms are calculated from theoretical and experimental (HPLC) triacylglycerol compositions, and the resulting values are compared with those contained in a database built from genuine olive oils.

3. MATERIAL AND REAGENTS

- 3.1. Oil purification
 - 3.1.1. 25-ml conical flasks.
 - 3.1.2. 5-ml screw top glass tubes and caps fitted with PTFE joint.

- 3.1.3. Silica gel cartridges, 1 g (6 ml), for solid phase extraction (for example, Waters, Massachusetts, USA).
- 3.1.4. *n*-hexane, analytical grade.
- 3.1.5. Solvent mixture of hexane/diethyl ether (87:13, v/v).
- 3.1.6. *n*-heptane, analytical grade.
- 3.1.7. Acetone, analytical grade.
- 3.2. HPLC analysis of triacylglycerols
 - 3.2.1. Micro syringes (50 µL) and needles for HPLC injection
 - 3.2.2. Propionitrile, super purity or HPLC grade (for example, ROMIL, Cambridge, United Kingdom), used as mobile phase.
- 3.2.3. HPLC column (25 cm x 4 mm i.d.), packed with RP-18 phase (4 μ m particle size).
- 3.3. Preparation of fatty acid methyl esters

(See Method A in COI/T.20/Doc. no. 24)

- 3.3.1. Methanol containing not more than 0.5% water.
- 3.3.2. Heptane, analytical grade.
- 3.3.3. A 2N solution of potassium hydroxide in methanol. Dissolve 1.1 g of potassium hydroxide in 10 ml of methanol.
- 3.3.4. 5-ml screw top glass tubes and caps provided with PTFE joint.
- 3.4. GC analysis of FAMEs

(See method for the determination of *trans*-unsaturated fatty acids by capillary column gas chromatography; COI/T.20/Doc. no. 17).

- 3.4.1. Micro syringes (5 μ L) and needles for GC injection.
- 3.4.2. Hydrogen or helium as carrier gas.
- 3.4.3. Hydrogen and oxygen for FID detector.
- 3.4.4. Nitrogen or helium as auxiliary carrier gas.
- 3.4.5. Fused silica capillary column (50-60 m x 0.25-0.30 mm i.d.) coated with cyanopropylpolysiloxane or cyanopropylphenylsiloxane phases (SP-2380 or similar) with $0.20-0.25~\mu m$ of film thickness.

4. APPARATUS

- 4.1. Vacuum apparatus for solid phase extraction.
- 4.2. Rotary evaporator.
- 4.3. HPLC equipment composed of:
 - 4.3.1. Degasser for the mobile phase.
 - 4.3.2. Rheodyne injector valve with a 10 µL loop.
 - 4.3.3. High pressure pump unit.
 - 4.3.4. Thermostatic oven for the HPLC column capable of maintaining sub-ambient temperatures (15-20 °C), (for example, Peltier type).
 - 4.3.5. Refractive index detector.
 - 4.3.6. Computerised data acquisition system provided with an integration program.
- 4.4. Capillary gas chromatography equipment described in COI/T.20/Doc. no. 17, provided with
 - 4.4.1. Split injector.
 - 4.4.2. Flame ionisation detector (FID).
 - 4.4.3. Oven with programmable temperature.
 - 4.4.4. Computerised data acquisition system provided with an integration program.
- 4.5. Computer with Microsoft EXCEL program.

5. ANALYTICAL PROCEDURE

5.1. Oil purification

An SPE silica gel cartridge is placed in a vacuum elution apparatus and washed under vacuum with 6 ml of hexane. The vacuum is released to prevent the column from drying and a conical flask is placed under the cartridge. A solution of the oil (0.12 g, approximately) in 0.5 ml of hexane is loaded into the column and the solution is pulled through and then eluted with 10 ml of the solvent mixture (3.1.5) of hexane-diethyl ether (87:13 v/v) under vacuum. The eluted solvent is homogenised and approximately half of the volume is poured into another conical flask. Both solutions are separately evaporated to dryness in a rotary evaporator under reduced pressure at room temperature. For triacylglycerol analysis, one of the residues is dissolved in 1 ml of acetone (See first paragraph of 5.2) and poured into a 5-ml screw top glass tube. The other residue is dissolved in 1 ml of n-heptane and poured into a second 5-ml screw top glass tube for preparing the fatty acid methyl esters.

Note: Oil purification may be done using a silica gel column, as described in IUPAC method 2.507.

5.2. HPLC analysis of triacylglycerols

Set up the HPLC system, maintaining the column temperature at 20°C and using propionitrile as the mobile phase at a flow rate of 0.6 ml/min. When the baseline is stable run a solvent injection; if the base line appears disturbed in the region from 12 to 25 min, use another type of acetone or a mixture of propionitrile/acetone (25:75) to resolve the sample.

Note: Some types of acetone produce disturbances of the baseline in the above-mentioned region.

Inject a 10 µl aliquot of the solution of purified oil in acetone (5%). The run takes approximately 60 min. Oven temperature and/or flow rate must be adjusted to achieve a chromatogram similar to that depicted in Figure 1 where trilinolein (peak 1) elutes at 15.5 min and the resolutions between the pairs LLL/OLLn (peaks 1 and 2) and OLL/OOLn (peaks 4 and 5) are good.

The height of peak 2 (OLLn+PoLL) must reach at least 3% of the full scale.

5.3. Preparation of fatty acid methyl esters.

Add 0.1 mL of a 2N solution of potassium hydroxide in methanol to the solution of purified oil in 1 mL of *n*-heptane. Cap the tube and screw tight. Shake the tube vigorously for 15 seconds and leave to stratify until the upper layer becomes clear (5 minutes). The *n*-heptane solution is ready to be injected into the gas chromatograph. The solution may be left at room temperature for a maximum of 12 hours.

5.4. GC analysis of fatty acid methyl esters

The procedure described in the method for the determination of *trans*-unsaturated fatty acids must be used (COI/T.20/Doc. no. 17).

The GC system is set up at an oven temperature of 165 °C . The recommended oven temperature is isothermal at 165 °C for 10 min, then raising it to 200 °C at

 $1.5~^{\circ}\text{C/min}$. An injector temperature between 220 $^{\circ}\text{C}$ and 250 $^{\circ}\text{C}$ is recommended to minimise the formation of *trans*-fatty acids (See IOOC method). Detector temperature 250 $^{\circ}\text{C}$. Hydrogen or helium must be used as the carrier gas at a column head pressure of 130 kPa, approximately. Injection volume $1\mu\text{L}$ in split injection mode.

A GC profile similar to that shown in Figure 2 must be obtained. Special attention must be paid to the resolution between C18:3 and C20:1 (the C18:3 peak must appear before the C20:1). To achieve these conditions, the initial temperature and/or the column head pressure must be optimised. Adjust the injector conditions (temperature, split ratio and volume injection) to minimise the discrimination of palmitic and palmitoleic acid.

The height of the C20:0 peak must be about 20% of full scale to quantify the *trans* isomers. If the C18:0 peak appears distorted, reduce the sample amount.

5. INTEGRATION OF CHROMATOGRAPHIC PEAKS

5.1. HPLC chromatogram

Figure 1 shows a typical HPLC chromatogram of the triacylglycerols of a purified olive oil. For peak integration, three baselines must be traced: the first between the start of peak 1 and the end of peak 3; the second between the start of peak 4 and the valley before peak 8; the third between the valley preceding peak 8 and the end of peak 18.

The total area is the sum of the areas of all the peaks (identified and not identified) from peak 1 to peak 18. The percentage of each peak is given by

$$TAG_x$$
 (%) = 100 ($A_x + A_T$)

The percentages have to be given to two decimal figures.

5.2. GC chromatogram

Figure 2 shows a GC chromatogram of fatty acid alkyl esters obtained from a purified olive oil. Percentages of the following fatty acids must be calculated:

Palmitic; P(C16:0) = methyl ester + ethyl ester

Stearic; S(C18:0) = methyl ester

Palmitoleic; Po (C16:1) = sum of methyl esters of the two *cis*-isomers Oleic; O (C18:1) = sum of methyl esters of the two *cis*-isomers +

ethyl ester + *trans*-isomers

Linoleic; L(C18:2) = methyl ester + trans-isomers

Linolenic; Ln (C18:3) = methyl ester + trans-isomers

Arachidic; A(C20:0) = methyl esterEicosenoic (gondoic); G(C20:1) = methyl ester

Ethyl and *trans*-isomers esters may be absent in the GC chromatogram.

Total area (AT) is the sum of all the peaks appearing in the chromatogram from C14:0 to C24:0, except that corresponding to squalene. The percentage of each peak is calculated as follows:

$$FA_x$$
 (%) = 100 ($A_x + A_T$)

The results have to be expressed to two decimal places.

For the calculations of the computer programs, it is not necessary to normalise to 100 because this is done automatically.

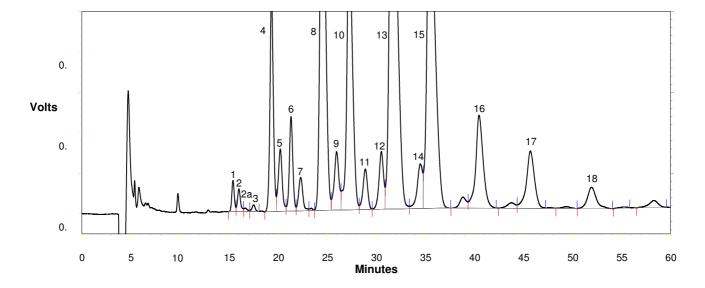


Figure 1. HPLC chromatogram of TAGs of a "Chamlali" virgin olive oil. Main components of chromatographic peaks:

- (1) LLL; (2) OLLn+PoLL; (3) PLLn; (4) OLL; (5) OOLn+PoOL;
- (6) PLL+PoPoO; (7) POLn+PPoPo+PPoL; (8) OOL+LnPP; (9) PoOO;
- (10) SLL+PLO; (11) PoOP+SPoL+SOLn+SPoPo; (12) PLP;
- (13) OOO+PoPP; (14) SOL; (15) POO; (16) POP; (17) SOO;
- (18) POS+SLS.

Table 1: Repeatability data of the determination of virgin olive oil TAGs by HPLC at a column temperature of 20° C and using propionitrile as mobile phase.

	1	Colum	n temper	ature or	1 20 C a	ina usin	g propio	nitrile as	modile	pnase.		
			Sample	1	Sample	2	Sample	3	Sample	4	Sample 3	5
ECN	HPLC peaks	TAGs	Mean (%)	RSD _r (%)								
	1	LLL	0.020	7.23	0.066	5.18	0.095	4.10	0.113	0.95	0.34	1.05
42	2	OLLn+ PoLL	0.085	7.44	0.24	1.78	0.26	2.25	0.35	2.02	0.50	2.83
	3	PLLn	0.023	15.74	0.039	5.51	0.057	5.62	0.082	4.35	0.12	6.15
	4	OLL	0.47	1.52	1.53	0.42	2.62	0.98	3.35	1.05	4.37	1.13
	5	OOLn+ PoOL	1.07	2.01	1.54	0.46	1.61	0.71	1.72	1.07	1.77	2.40
44	6	PLL+ PoPoO	0.11	12.86	0.24	4.37	0.65	1.32	1.35	0.73	2.28	1.24
	7	POLn+ PpoPo+ PpoL	0.42	5.11	0.49	2.89	0.55	2.01	0.85	1.83	1.09	1.96
	8	OOL+ LnPP	6.72	0.63	8.79	0.31	11.21	0.42	13.25	0.33	15.24	0.23
	9	PoOO	1.24	2.86	1.49	0.95	1.63	0.85	2.12	0.45	2.52	0.56
46	10	SLL+ PLO	2.70	0.65	4.05	0.70	6.02	0.65	9.86	0.53	11.53	0.31
	11	PoOP+ SpoL+ SOLn+ SpoPo	0.64	4.42	0.69	3.02	0.79	1.23	1.53	0.89	1.70	1.66
48	12+13	OOO+ PLP+ PoPP	49.60	0.07	48.15	0.06	42.93	0.06	33.25	0.10	24.16	0.06
	14	SOL	0.82	1.72	0.92	1.56	1.05	1.32	1.25	1.05	1.60	1.77
	15	POO	22.75	0.25	21.80	0.20	21.05	0.30	20.36	0.35	20.17	0.14
	16	POP	3.05	0.46	4.56	0.42	4.98	0.52	5.26	0.41	5.57	0.38
7.0	17	SOO	6.87	0.21	5.56	0.33	4.86	0.43	4.12	0.72	3.09	0.69
50	18	POS+ SLS	1.73	1.23	1.65	1.10	1.54	0.99	1.49	1.10	1.41	1.00

n = 3 replicates

 $RSD_r = Relative Standard Deviation of the repeatability$

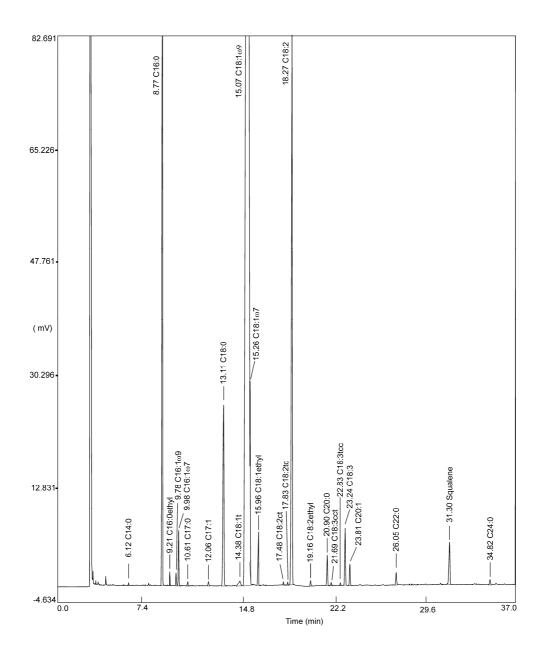


Figure 2. GC chromatogram of fatty acid alkyl esters obtained from an olive-pomace oil by transesterification with a cold solution of KOH in methanol.

ANNEX 1

DETECTION OF EXTRANEOUS OILS IN OLIVE OILS BY MEANS OF A COMPARISON OF MATHEMATICAL ALGORITHMS WITH A DATA BASE BUILT FROM GENUINE OLIVE OILS

1. CALCULATION

1.1. Triacylglycerol composition

Peaks of ECN42 TAGs

LLL = peak 1

OLLn = peak 2+shoulder 2a must be summed (*Note 1*)

PLLn = peak 3

Note 1. In some oils, and in very good chromatographic conditions, the shoulder may be resolved as a separate peak. In this case, the area must be summed to that of peak 2.

Peaks of ECN44 TAGs

OLL = peak 4

OOLn = peak 5 + posterior shoulder, if it is present (In Figure 1, this shoulder

is not present).

PLL = peak 6

POLn = peak 7 + posterior shoulder if it is present (In Figure 1, this shoulder is

not present)

Peaks of ECN46 TAGs

OOL = peak 8

1.2. Fatty acid composition

A GC chromatogram of fatty acid alkyl esters obtained by cold transmethylation with a methanolic solution of KOH from a purified olive oil is shown in Figure 2. Percentages of P, Po, S, O, L, Ln, A, and G acids must be calculated.

2. MATHEMATICAL ALGORITHMS TO DISCRIMINATE THE OILS.

2. 1. Parameters to classify the oils in groups

$$\begin{split} LLL_{Theor}. \\ \Delta OOL &= OOL_{Theor}. \text{- }OOL_{HPLC} \\ \Delta LLL &= LLL_{HPLC} \text{- }LLL_{Theor} \\ Ln &= \% \text{ linolenic acid} \\ \Delta ECN44_p &= (PLL + POLn)_{HPLC} \text{- }(PLL + POLn)_{Theor} \end{split}$$

The oil sample is classified in one of the eight groups according to its LLL_{Theor} value:

- a) ≤0.018 %
- b) $> 0.018 - \le 0.040 \%$
- $> 0.040 \le 0.090 \%$ c)
- d) $> 0.090 - \le 0.15$ %
- $> 0.15 \le 0.25 \%$ e) $> 0.25 - \le 0.35 \%$ f)
- > 0.35 ≤ 0.55 % g)
- h) > 0.55 %

In each group the oils are classified in subgroups according to the values of ΔOOL or ΔLLL.

- 2.2. Parameters for comparison with the data base
- 2.2.1. Legal limit: $\Delta ECN42 = ECN42_{HPLC} ECN42_{Theor}$. For information purposes only because this limit is not used to verify the genuineness of the oil.
- 2.2.2. Previous criterion for groups a, b and h. R1_{exp} = LLL_{HPLC}/OLLn_{HPLC} If $R1_{exp} \le limit$, the oil is genuine.
- 2.2.3. 1st criterion:

$$K1 = \left(LLL_{HPLC} + OLLn_{HPLC}\right) * \left(OLL_{Theor} + OOLn_{Theor}\right) / \left(LLL_{Theor} + OLLn_{Theor}\right) * \left(OLL_{HPLC} + OOLn_{HPLC}\right)$$

If $K1 \leq limit_{lw}$, the oil is genuine

If $K1 > limit_{up}$, the oil is non-genuine

For groups b, c, and d, there is an intermediate limit. If K1 lies between the intermediate and upper limits, and L3 (see further on) is higher than 0.50 the oil is not genuine.

2.2.4. 2^{nd} criterion: $\Delta R1 = [LLL / OLLn]_{HPLC} - [LLL / OLLn]_{Theor.}$

If $\Delta R1 \le limit_{lw.}$, the oil is genuine

If $\Delta R1 > limit_{up}$, the oil is non-genuine

2.2.5. 3^{rd} criterion: $\Delta R3 = [OLL / OOLn]_{HPLC} - [OLL / OOLn]_{Theor.}$ If $\Delta R3 \le limit_{lw.}$, the oil is genuine

If $\Delta R3 > limit_{up}$, the oil is non-genuine

2.2.6. 4^{th} criterion: $L4 = [\Delta LLL - \Delta OLLn] / LLL_{Theor}$.

If $L2 \le limit_{lw}$, the oil is genuine

If $L2 > limit_{up.}$, the oil is non-genuine

2.2.7. 5^{th} criterion: L3 = [Δ LLL - Δ OLLn] / OLLn_{Theor}

If $R2 \ge limit$, the oil is genuine

If R2 < limit, the oil is non-genuine

2.2.8. 6^{th} criterion: R2 = $[\Delta OLL * LLL_{Theor}] / [\Delta LLL * OLL_{Theor}]$

Where $\Delta LLL = LLL_{exp} - LLL_{theor}$ COI/ T.20/Doc. no. 25 page 10

$$\Delta OLLn = OLLn_{exp} - OLLn_{theor}$$

 $\Delta OLL = OLL_{exp} - OLL_{theor}$

2.3. Determination of limits

For each subgroup, the limits for some parameters are given by the equation:

limit versus ΔECN44p value

The 1st, 2nd, 3rd, 4th, and 5th criteria have lower and upper limits (Lwlimit and Uplimit), whereas the 6th criterion has only one limit.

The values of each criterion are sequentially compared with the upper and lower limits. Values between them indicate that the next parameter has to be compared. Figure 3 shows the flow diagram of the sequential procedure.

The criteria are compared in the order indicated above, except for groups g and h where $\Delta R3$ is compared after L3.

3. APPLICATION OF THE COMPUTER PROGRAM.

- 3.1. Load EXCEL on the computer.
- 3.2. Open the file GLOBAL.XLS contained in the diskette.
- 3.3. Activate "Macro" if it is necessary.
- 3.4. Click the "**Press to initiate calculation**" button.
- 3.5. Enter data in **yellow cells** only (Figure 4)
- 3.5.1. In "Sample code", type the description of the sample
- 3.5.2. In "Oil category" type:

"EV" for edible virgin olive oils (extra, and virgin categories)

"L" for lampante olive oil

"R" for the refined olive and olive (blend of virgin and refined olive oils) categories.

This code is necessary to calculate the official limit for Δ ECN42.

- 3.5.3. In "Introd. FAMEs-GC", type the fatty acid composition. The program automatically normalises the percentages to the sum of the eight fatty acids. If ¡Warning; comes up, please revise the fatty acid data.
- 3.5.4. Type the triacylglycerol data in the corresponding cells. Please revise the data.
- 3.6. The program calculates the theoretical triacylglycerol composition from the normalised fatty acid composition.

- 3.7. Using the experimental and theoretical triacylglycerol percentages, the program calculates the values of the mathematical algorithms corresponding to the oil sample and the values of the limits.
- 3.8. The command "**Press control+letter**" appears in the red band, indicating the LLL_{Theor} range in which the oil is classified.
- 3.9. To see the results, press simultaneously "control" and the specified letter keys; the results sheet for the oil sample then comes up (Figure 5).
- 3.10. Read the result in the red bands.

"The oil is correct" indicates that the oil is a genuine olive oil or that the adulteration level is low.

"The oil is not correct" indicates that the oil is a non-genuine olive oil. For each criterion, the values of the algorithms are typed in bold figures. The higher and lower limits and the values of other parameters are also indicated.

- 3.11. Click the button "**Press to print the results**" to print the results. Two sheets will be printed: the experimental data and the values and limits for the sample.
- 3.12. Click the button "**Press for a new calculation**" to reinitialise the program. All data will be erased.

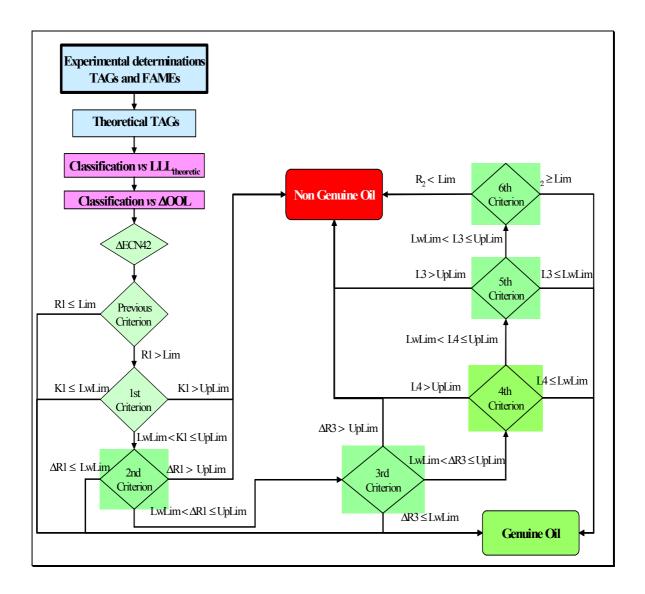


Figure 3. Flow diagram of the sequential procedure

EXPERIMENTAL DATA Fill only yellow cells **Sample Code** VOO + VHO Oil Category R Refined Olive Oil C18:2 C18:3 C20:0 C20:1 Area % (GLC) C16:0 C18:0 C16:1 C18:1 Sum FAMEs-Comp. Corr. 9,62 2,94 0,41 79,39 6,52 0,49 0,33 0,30 100,00 Introd. FAMEs-GC 9,62 2,94 0,41 79,37 6,52 0,49 0,33 0,30 99,98 **HPLC Experimental Data** ECN44 ECN42 ECN46 LLL OLLn PLnL OLL OOLn PLL POLn OOL 0,12 0,19 0,04 1,55 1,28 0,22 0,47 12,57 Press CTRL+b to see criteria for LLL theor. 0,018 - 0,040

Figure 4. Data sheet of the calculation program

page 14

			L theor. 0,018 - (
Comple Code	V00 - VIII0	Calculati	on Parameters	
Sample Code	VOO + VHO	D (* 101 01		
Oil Category	R	Refined Olive Oil		
ΔECN42 =	0,14	0,35	Proceed to the	e Early Criterion
	- 7	, , , , ,		· · · •
Early Criterion R				
Parameter	Value	Límit		
R1 exp. 0,63		0,40	Proceed to the	e Criterion 1
Criterion 1 K1			1	
Parameter			Lower Limit	
K 1	1,15			
L3	0,41	1,35	0,95	
				Duagonal to the Cuitorian C
				Proceed to the Criterion 2
Criterion 2 ∆ECN	I44p <i>vs</i> ∆R1			
Parameter	Value	Higher Limit	Lower Limit	
<u>⊿</u> R1 =	0,46			
ΔΟΟL =	-0,69			
∆ECN44p	0,26	0.51	0.07	Proceed to the Criterion 3
		0,51	0,37	Proceed to the Criterion 3
Criterion 3 ∆ECN	I44p vs ΛR3		Ī	
Parameter	Value	Higher Limit	Lower Limit	
∆R3 =	0,26			
∆00L =	-0,69			
		0.50	0.05	
		0,50	0,25	Proceed to the Criterion 4
Criterion 4 L4			1	
Parameter	Value	Higher Limit	Lower Limit	
L4 =	2,52			
∆00L =	-0,69			
		0.00	4.00	
		6,00	4,00	The oil is correct
Criterion 5 L3			Ī	1110 0111000
Parameter	Value	Higher Limit	Lower Limit	
L3 =	0,41			
Δ00L =	-0,69			
		0.00	0.40	
		0,60	0,40	
Criterion 6 R2			Ī	
Parameter	Value	Límit		
R2 =	0,168			
Δ00L =	-0,69			
		0.400		
		0,100		
Dunne to Duint	Б ()			
Press to Print	Press for a N			
Results	Calculation	n		

Figure 6. Results sheet